



**Conveline**<sup>®</sup>  
*Inspired by Excellence*



BEST QUALITY  
& DURABLE  
PERFORMANCE



QUICK SHIPPING /  
FAST DELIVERY OPTION



BEST FOR LOADING/  
UNLOADING



SPACE SAVING &  
SIMPLE TO USE

**FLEXIBLE ROLLER  
CONVEYORS**

# FLEXIBLE ROLLER CONVEYORS – POWERED & GRAVITY

- Best suitable in truck loading/unloading application
- Requires less storage space when fully retracted
- Available in both mild steel and stainless-steel structure
- Weight carrying capacity up to 95 kg / meter in powered flexible conveyor system which is highest in the industry
- Powered conveyor is suitable for transfer any products at variable speed
- Less maintenance
- Self tracking design
- Mostly Used in all General Applications area
- Heavy duty 5° castor wheel
- Handles at each end of units

## OPTIONS


- Photo sensor for package stop
- Zero pressure accumulation
- Master/Slave provision to connect multiple conveyors
- Side guides

## AVAILABLE

in two standard width options.

- 600mm
- 800mm

## 1:3 Expandable Length

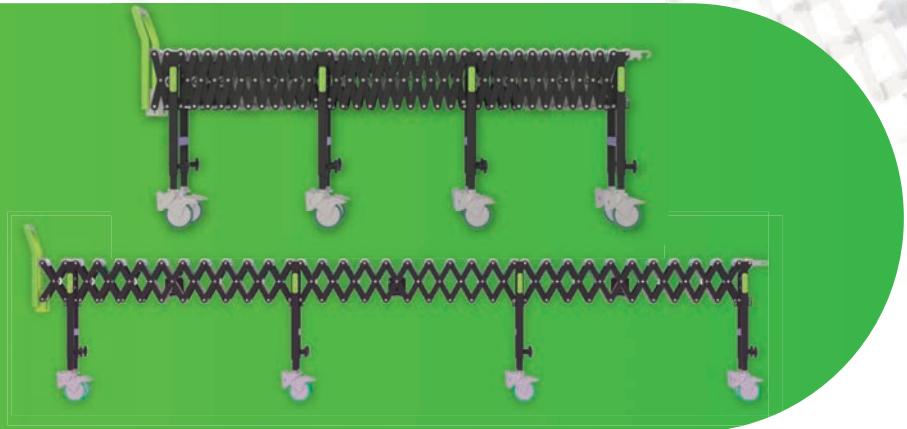

Model	Close Length	Open Length	Width	Height	Speed (mpm)	Power (W)
6001FL-03	1377	3645	600, 800	800 – 1000	10 – 20	270
6001FL-04	1836	4860	600, 800	800 – 1000	10 – 20	360
6001FL-05	2295	6075	600, 800	800 – 1000	10 – 20	450
6001FL-06	2754	7290	600, 800	800 – 1000	10 – 20	540
6001FL-07	3213	8505	600, 800	800 – 1000	10 – 20	630
6001FL-08	3672	9720	600, 800	800 – 1000	10 – 20	720

## Note

Please mention code “6001FLG” instead of “6001FL” for gravity roller conveyor. Length above 10000mm is available on request.

## SPECIFICATIONS

- Roller Width: 400, 600, 800, 1000mm
- Length: 4000mm and up
- Light Load version: Up to 50 Kg / m
- Heavy Load version: Up to 100 kg / m
- Speed: Up to 40 mpm
- Height adjustment 800 – 1000mm
- Conveyor able to turn 180 °
- Two conveyors easily attachable & removable
- Bidirectional






**PU O Ring**



**Skate Wheel Type**



**5 inch dia plate type castor wheel**

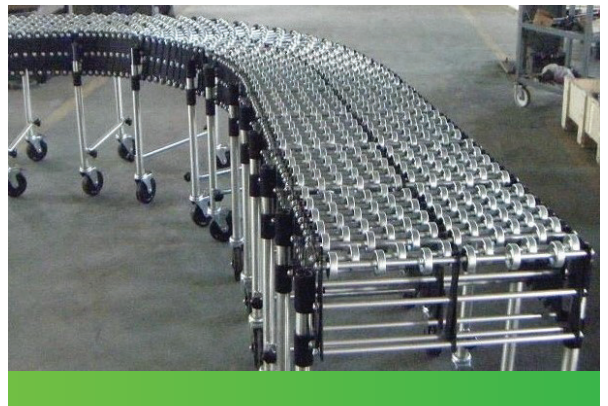

**Optional steel skate wheel**

## **INCLINED BELT CONVEYOR WITH FLEXIBLE CONVEYOR**

- Best suitable for automatic truck loading/unloading application.
- Inclined belt conveyor with hydraulic adjustment gives flexibility to load/unload different height vehicles.
- Best suitable for small vehicles loading/unloading up to 20 feet.
- Weight carrying capacity up to 50 kg / meter.



Model	Belt conveyor Length	Flexible conveyor Length	Height	Speed (mpm)
6001FLI-01	2100	3645	600, 800	800 – 1000
6001FLI-02	2760	4860	600, 800	800 – 1000
6001FLI-03	3420	6075	600, 800	800 – 1000

### **Notes**

- Conveyors dimensions different from above will be available on request as per application.
- Conveyor height and angle available on request as per application.

*Inspired by Excellence*



**CONOVEY (A DIVISION OF THREE O FOUR LIMITED)**

493 Main Street East Units 1-8  
Milton, Ontario Canada L9T 3J2

+1 844 876 8889  
sales@conovey.com  
www.conovey.com

**Need Something Different?**

Conveline sales team will provide you complete solution for your specific custom application.